

TECHNISCHE SPECIFICATIES

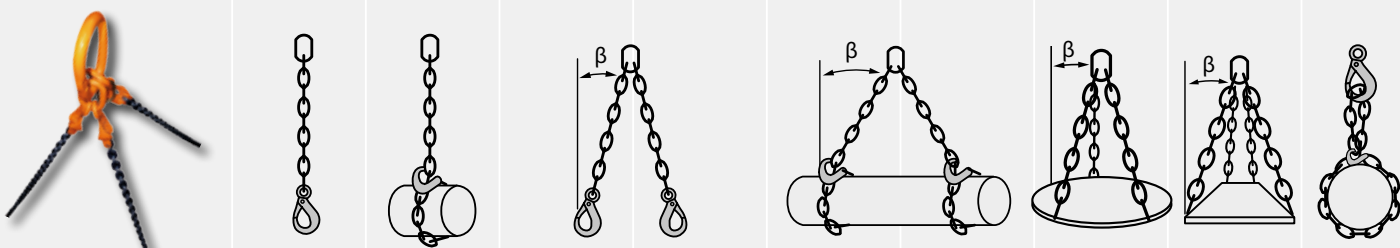









HIJSMIDDELEN



Ratering
technische groothandel

HIJSMIDDELEN BELASTINGTABEL

HIJSKETTINGEN

hoek β	enkel		2-sprongen				3- en 4- sprongen		eindloos
	-	-	tot 45°	45° - 60°	tot 45°	45° - 60°	tot 45°	45° - 60°	-
lastfactor	1	0,8	1,4	1	1,12	0,8	2,1	1,5	1,6
									
draaddikte (mm)	draagvermogen (kg)								
5	1.000	800	1.400	1.000	1.120	800	2.000	1.500	1.600
6	1.400	1.120	2.000	1.400	1.600	1.120	3.000	2.120	2.240
7	1.900	1.500	2.650	1.900	2.120	1.500	4.000	2.800	3.000
8	2.500	2.000	3.550	2.500	2.800	2.000	5.300	3.750	4.000
10	4.000	3.150	5.600	4.000	4.250	3.150	8.000	6.000	6.300
13	6.700	5.300	9.500	6.700	7.500	5.300	14.000	10.000	10.600
16	10.000	8.000	14.000	10.000	11.200	8.000	21.200	15.000	16.000
19	14.000	11.200	20.000	14.000	16.000	11.200	30.000	21.200	22.400
22	19.000	15.000	26.500	19.000	21.200	15.000	40.000	28.000	30.000
26	26.500	21.200	37.500	26.500	30.000	21.200	56.000	40.000	42.500

HIJSBANDEN EN RONDSTROPPIEN

kleur	W.L.L KG		W.L.L KG		W.L.L KG		W.L.L KG	
	1	2	3	4	5	6	7	8
PAARS	1.000	800	2.000	1.400	1.000	1.400	1.000	1.000
GROEN	2.000	1.600	4.000	2.800	2.000	2.800	2.000	2.000
GEEL	3.000	2.400	6.000	4.200	3.000	4.200	3.000	3.000
GRIJS	4.000	3.200	8.000	5.600	4.000	5.600	4.000	4.000
ROOD	5.000	4.000	10.000	7.000	5.000	7.000	5.000	5.000
BRUIN	6.000	4.800	12.000	8.400	6.000	8.400	6.000	6.000
BLAUW	8.000	6.400	16.000	11.200	8.000	11.200	8.000	8.000
ORANJE	10.000	8.000	20.000	14.000	10.000	14.000	10.000	10.000

Bron: Rema Holland BV